

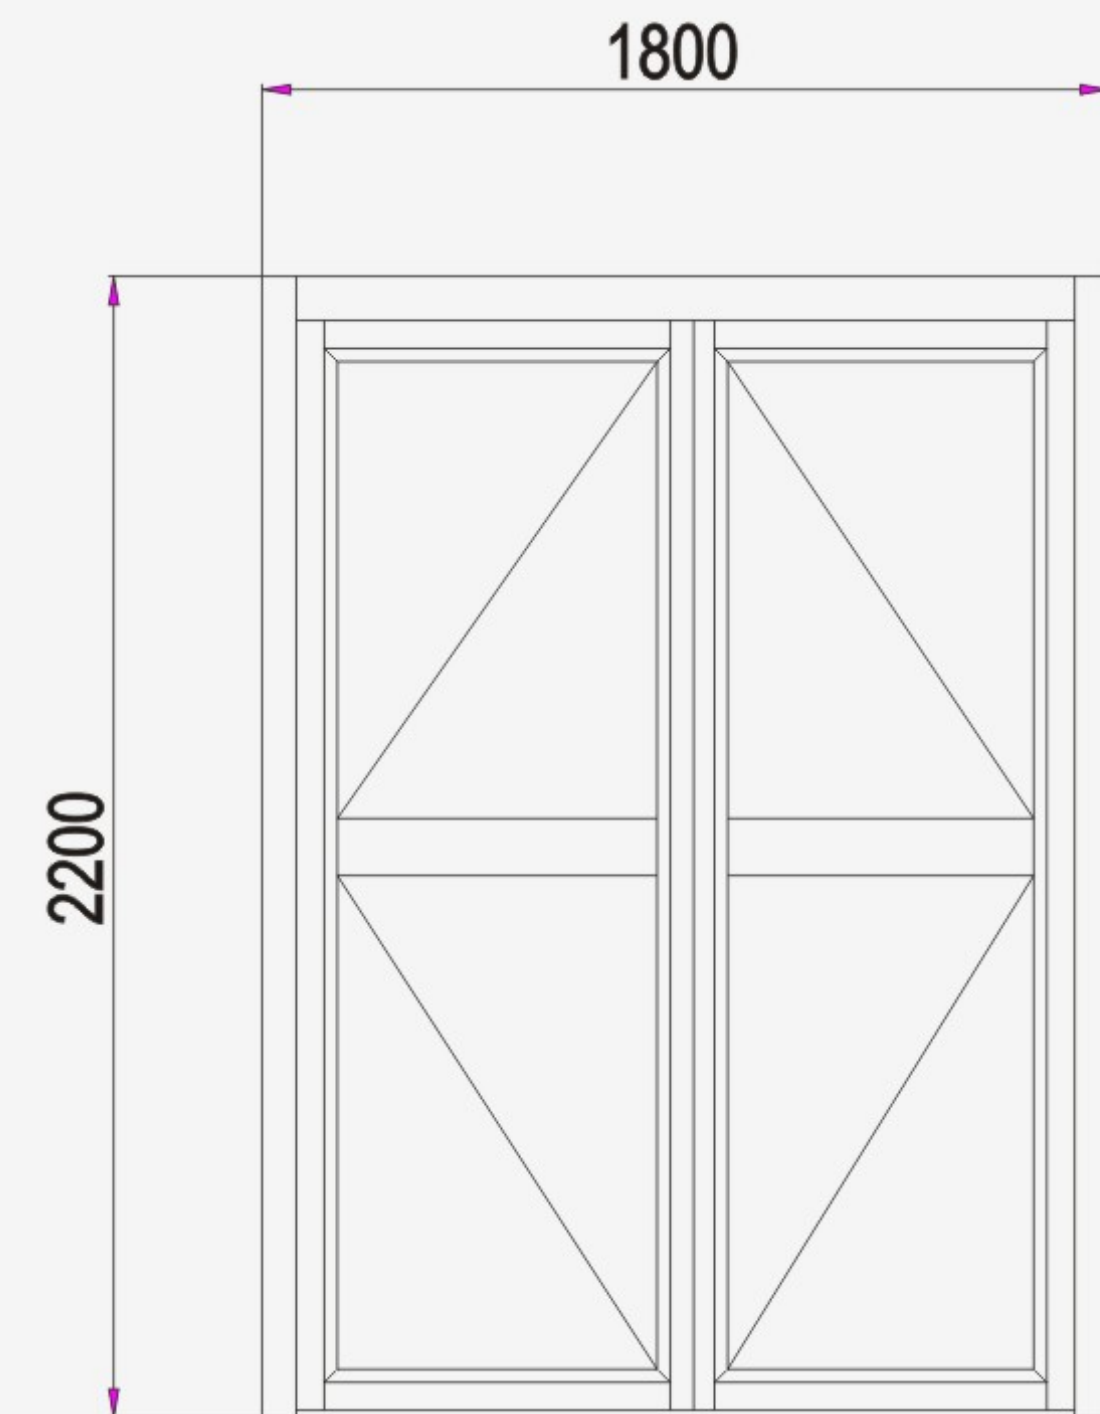


GUANG YA

46 Series Aluminum Swing Door

46 Series Aluminum Swing Door

Product: 46 aluminum swing door
 Profile type: Ordinary aluminum section
 Frame size: 46mm
 Glazing option: 13~34mm
 Open way: Inward and outward flat opened
 Profile thickness: 2.0mm
 Usage of aluminum profile: 6.91kg/m²
 Accessories: Provided by Guangya



Product Features:

1. Reasonable section structure and good holding capacity.
2. Vertical seal with Silicon strip makes it with good airtight performance.
3. It can be opened inward or outward, flexible and convenient.
4. It's widely used in hotels, shops and office buildings.

Accessories:

Name	Price*
Floor Spring	¥ 200 - ¥ 1000/ pc
Sealant	¥ 2 - ¥ 5/ meter
Weather Strip	¥ 0.2 - ¥ 0.5/ meter
Silicone Sealant	¥ 10 - ¥ 15/ pc

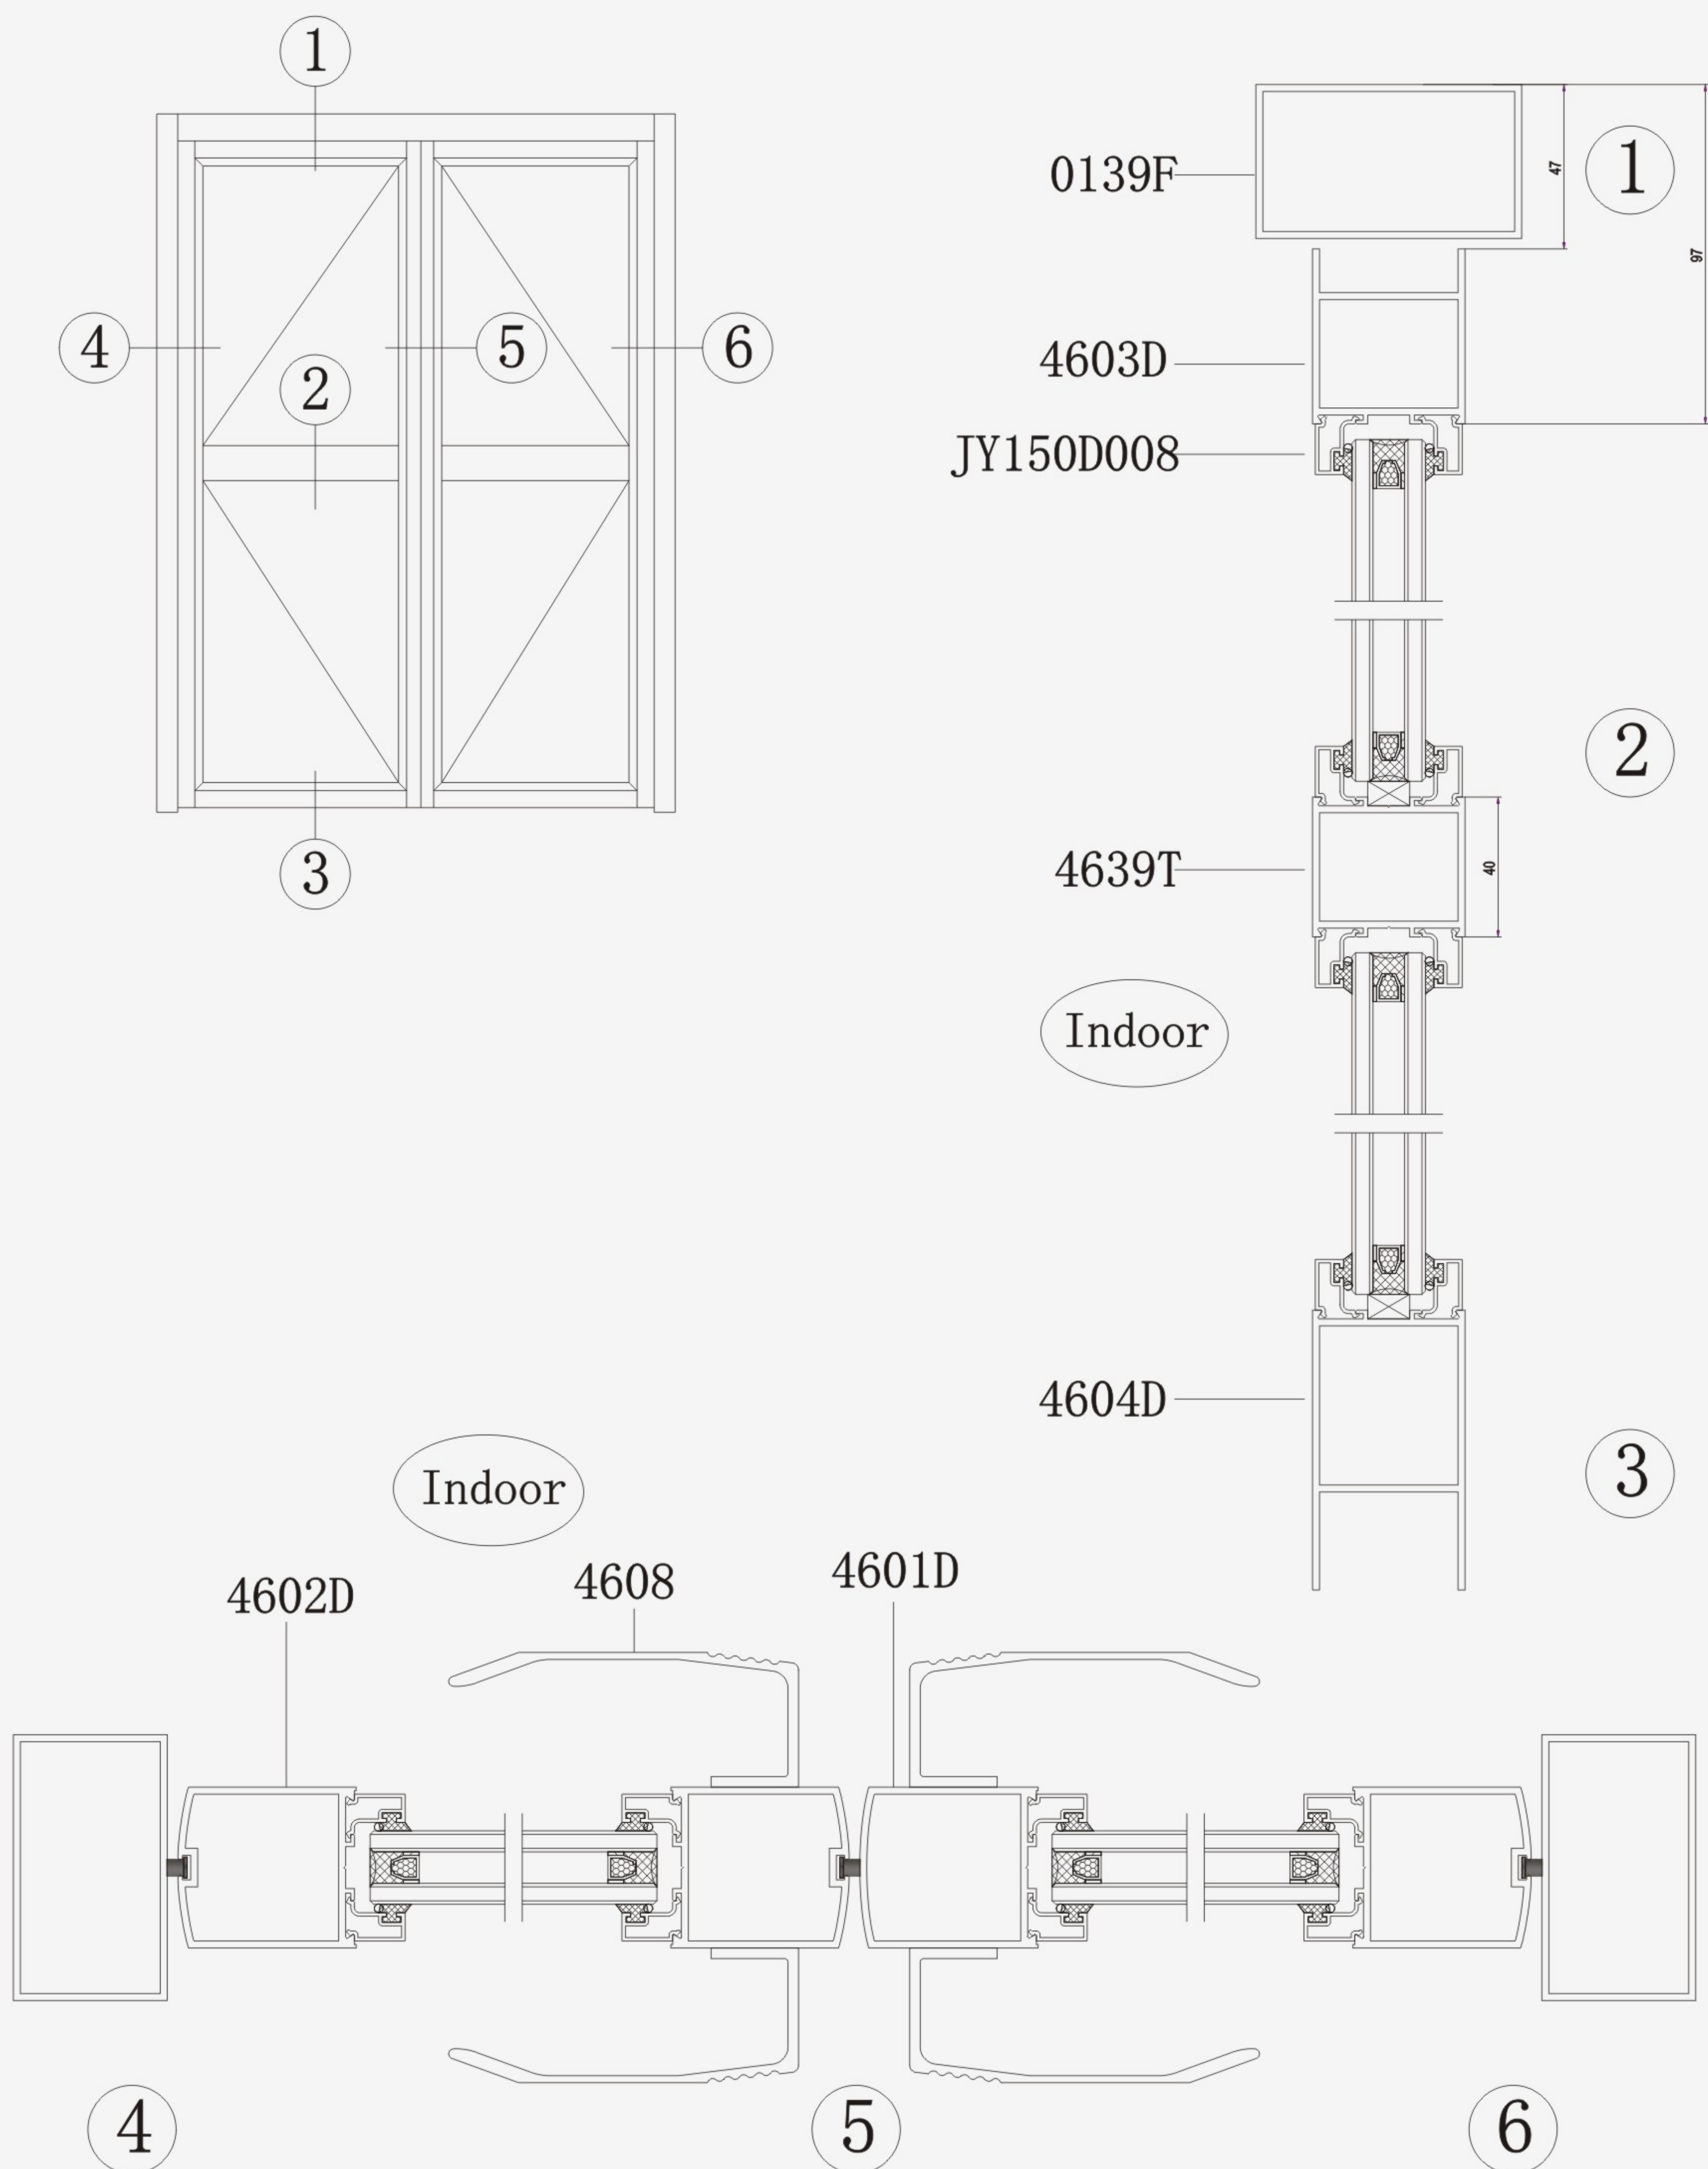
* For reference only,subject to further change.



GUANG YA

46 Series Aluminum Swing Door

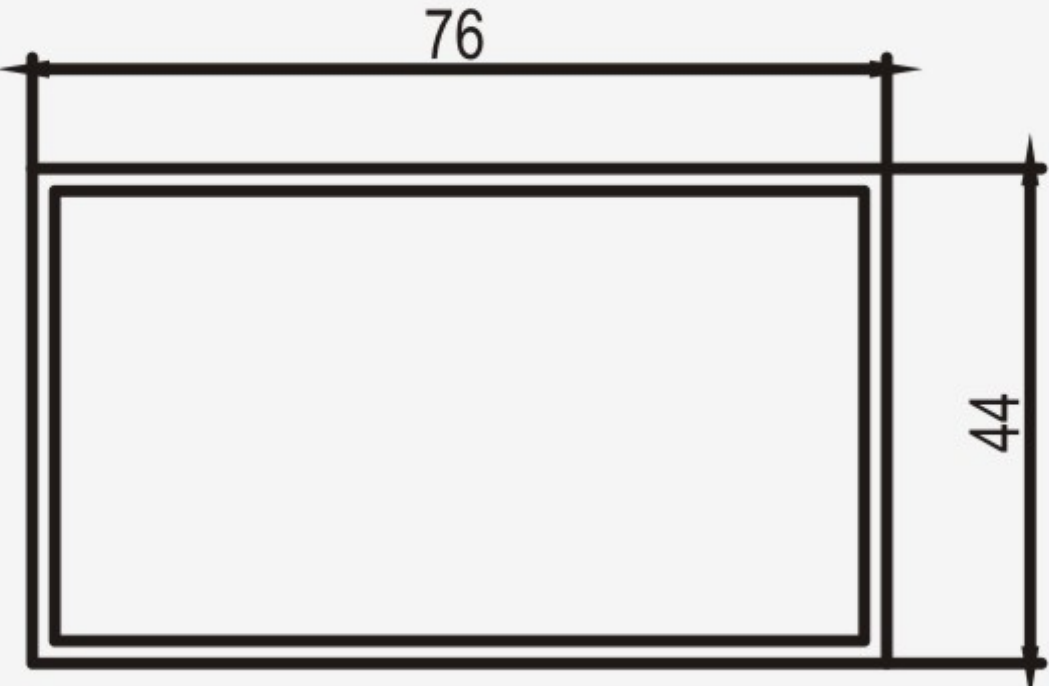
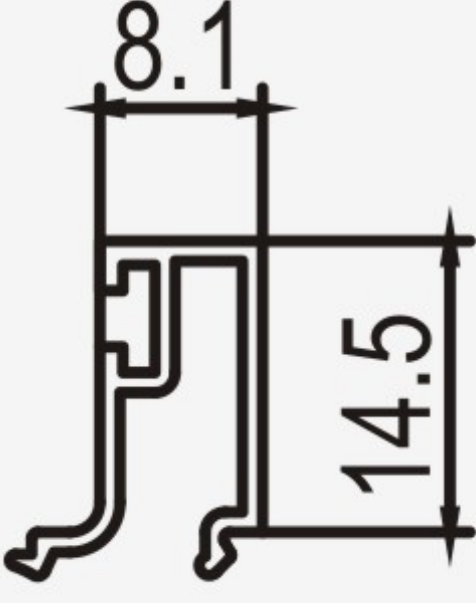
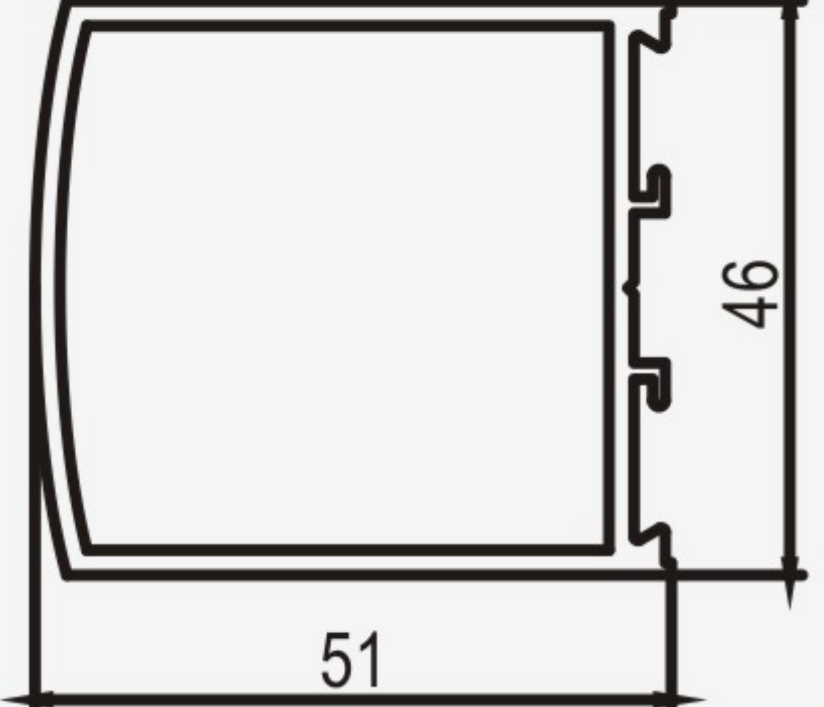
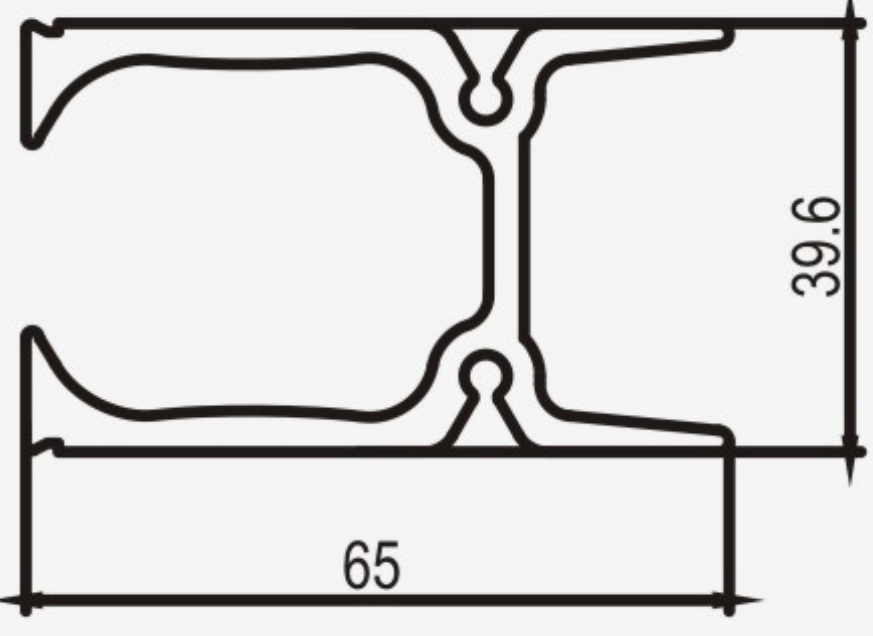
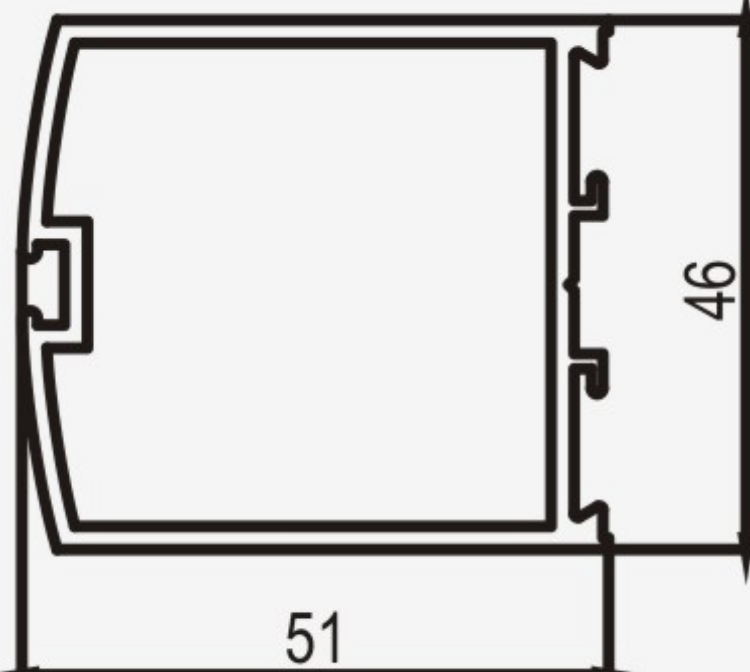
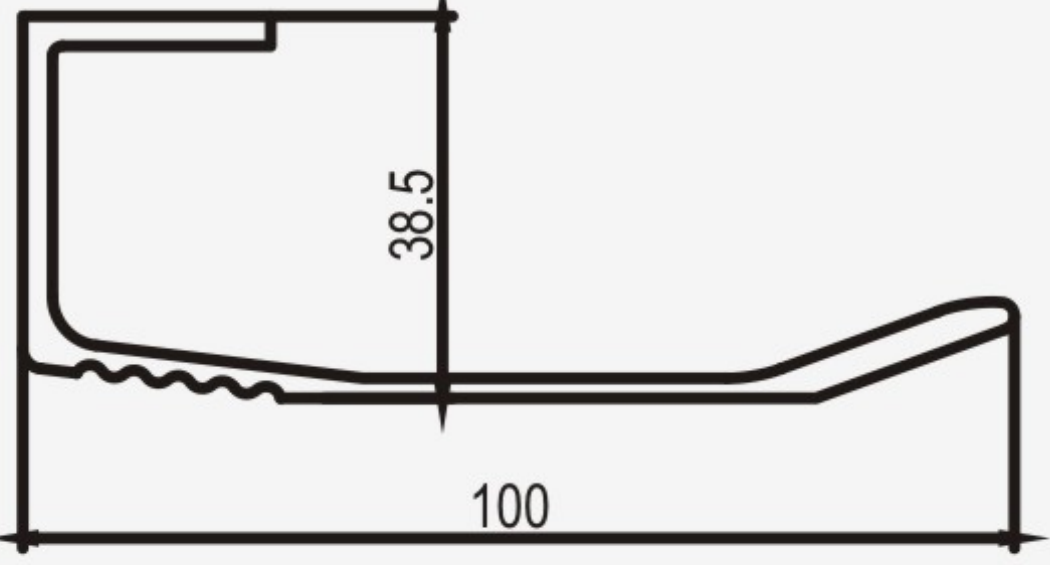
46 Series Aluminum Swing Door





GUANG YA

46 Series Aluminum Swing Door

Application	Tube	Application	Bead	Application	Interlock
DWG No.	0139F	DWG No.	JY150D008	DWG No.	4601D
Thickness	$\delta = 2.0$	Thickness	$\delta = 1.0$	Thickness	$\delta = 2.0$
T.W.	1.257kg/m	T.W.	0.136kg/m	T.W.	1.027kg/m
		<p style="text-align: center;"><small>*Assembled For 4604D, Glazed For 25.8mm</small></p> 			
Application	Connector	Application	Mohair Interlock	Application	Alum. Handle
DWG No.	4635	DWG No.	4602D	DWG No.	4608
Thickness	-----	Thickness	$\delta = 2.0$	Thickness	-----
T.W.	1.700kg/m	T.W.	1.070kg/m	T.W.	1.175kg/m
					
Application	Top Rail	Application	Bottom Rail	Application	Middle Rail
DWG No.	4603D	DWG No.	4604D	DWG No.	4639T
Thickness	$\delta = 2.0$	Thickness	$\delta = 2.0$	Thickness	$\delta = 2.0$
T.W.	1.001kg/m	T.W.	1.326kg/m	T.W.	0.922kg/m
